


Altus 8

2 and 3-Lamp Direct/Indirect

CATALOG NUMBER _____
 TYPE _____
 DATE _____
 PREPARED BY _____
 PROJECT _____



Housing: 4-3/4" deep, die-formed code gauge steel housing with high reflectance, non-glare white powder coat finish (minimum reflectance 90%) over rust inhibiting phosphate coat. Top mounted access plate with two knockouts and ground screw. Knock outs on both ends for through wiring

Shielding: Post-painted white powder coat microperf shield with a non-glare acrylic inlay.


Reflector: Post-painted high reflectance, non-glare white powder coat finish (minimum reflectance 90%).

Electrical: Fully wired with a universal voltage 120V – 277V, 50/60Hz AC, thermally protected, automatic resetting, Class P, sound rated A, high power factor electronic ballast. 347V and 480V available. Electronic HPT8 or Normal Ballast Factor instant start ballast, <10% THD with EOL circuitry. UL and C-UL listed.

Mounting: Lay-in for NEMA type G, T-bar ceilings. Optional plaster/sheet-rock mounting kits available.

Critical Application: SIMKAR strives to offer the most current product designs and premium value. All SIMKAR products are constantly under review and subject to redesign and revision. Critical criteria such as size, operating temperature, or operation with accessories should be confirmed with the factory.

Dimensions

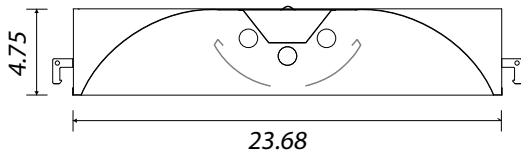

2': 23.68 outside / 22.89 inside
 4': 47.75" outside / 47" inside

A8C Ordering Information

Series	Size	Diffuser	#Lamps	Lamp Wattage/Type	Ballast	Switching	Voltage
A8C = Recessed, Center Perf Shield	22 = 2' X 2'	P = Perf Shield	2	17T8 = 17W T8, 2' unit	E = Electronic E(x)* = Electronic HPT8* D = Dimming DH = Daylight Harvesting**	For 3 lamp units Blank = (1) 1-lamp ballast and (1) 2 lamp ballast 3L = (1) 3 lamp ballast For 2 lamp units Blank = (1) 2-lamp ballast 2/1L = (2) 1-lamp ballasts	U1 = 120V - 277V U3 = 347V - 480V 347 = 347V
	24 = 2' X 4'		3	32T8 = 32W T8, 4' unit			
				32HP8 = 32W HPT8, 4' unit			

* Specify (L)Low, (N)Normal, or (H)high. Contact factory for NEMA Premium

** F32T8 only

Options	Accessories
BP = Bulk Pack	GCK22 = Sheetrock/plaster grid kit for 2' X 2' units
ELS1 = Emergency Lighting (low lumens)	GCK24 = Sheetrock/plaster grid kit for 2' X 4' units
ELS2 = Emergency Lighting (medium lumens)	
ELS3 = Emergency Lighting (high lumens)	
FL4 = 3/8" 6' flex with two #18. One ground and two connectors.	
FL5 = 3/8" 6' flex with three #18. One ground and two connectors.	
M = Master, includes 11' intertie and snap-in connector.	
S = Satellite, includes snap-in connector	
L = Lamps installed (contact factory)	