


# TECHNICAL SPECIFICATIONS

## ID Industrial Decorative

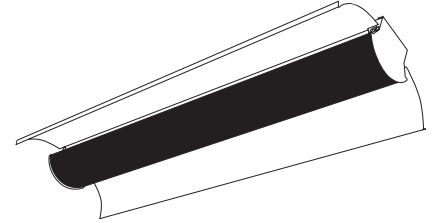

CATALOG NUMBER \_\_\_\_\_  
 TYPE \_\_\_\_\_  
 DATE \_\_\_\_\_  
 PREPARED BY \_\_\_\_\_  
 PROJECT \_\_\_\_\_

**HOUSING:** Die-formed heavy gauge steel with high-gloss, baked white enamel finish over rust inhibiting phosphate coat. 7/8" knockouts provided for easy installation. Wired flip-up socket bars standard.

**REFLECTOR:** Strong, rigid, die-formed white reflector in 4' sections. Optional perforated reflector for ambient uplight available.

**ELECTRICAL:** Fully wired for UNV 120-277V, 50-60Hz operation with thermally protected, automatic resetting Class P, sound rated A ballast as standard unless otherwise specified. UL listed.

**MOUNTING:** Surface mount or pendant mount with aircraft cable or stem/canopies. Individual mounting only.

### IDP Industrial Decorative Ordering Information

Series	Lamps
IDP	232 = (2) 32W 48" T8

Ballast	Voltage	Accessories
B11 = Electronic T8	UNV =	PM(x) = Twin Pendant Mount, 2 white stems - specify length in inches (24, 36, 48, 60, 72)
B11HP(x) = HPT8*	120-277V	CACC(xx) = Cable Kit, includes 2 cables, mounting hardware, white power cord and canopies; specify length in inches (48 or 72)
		C = Single white canopy

\*CEE listed T8; specify (L)ow, (N)ormal, or (H)igh ballast factor. Contact factory for NEMA Premium.

### Dimensions

