

LP5 / LS5
Low profile standard and
side mount T5 strips

CATALOG NUMBER _____
 TYPE _____
 DATE _____
 PREPARED BY _____
 PROJECT _____



HOUSING: Die formed heavy gauge steel chemically treated to insure superior adhesion of post production applied high reflectance powder coating.

OPTIONS: optional side mount versions available.

ELECTRICAL: Fully wired for 120V 60Hz AC operation with ETL-CBM, thermally protected, automatic resetting, high power factor ballast. UL and CUL listed for damp locations. Universal voltage models available with increased housing size to accommodate larger ballasts.

MOUNTING: Ceiling or surface mount. 3/8" feed connector is included for use with steel flex conduit. Not recommended for through wiring.

LP5 Low Profile Ordering Information


Series	# Lamps	Lamps	Voltage
LP5	1	<i>Preheat</i> 06 = F6T5 (9") 120V Only 08 = F8T5 (12") 120V Only <i>Standard</i> 14 = F14T5 (22") 21 = F21T5 (34") 28 = F28T5 (46") <i>HO</i> 24H = F24T5HO (22") 39H = F39T5HO (34") 54H = F54T5HO (46")	U1 = 120-277V 120 = 120V

LS5 Low Profile Side-Mount Ordering Information


Series	# Lamps	Lamps	Voltage
LS5	1	<i>Standard</i> 14 = F14T5 (22") 21 = F21T5 (34") 28 = F28T5 (46") <i>HO</i> 24H = F24T5HO (22") 39H = F39T5HO (34") 54H = F54T5HO (46")	U1 = 120-277V

LP5/LS5 Low profile standard and side mount T5 strips

Dimensions

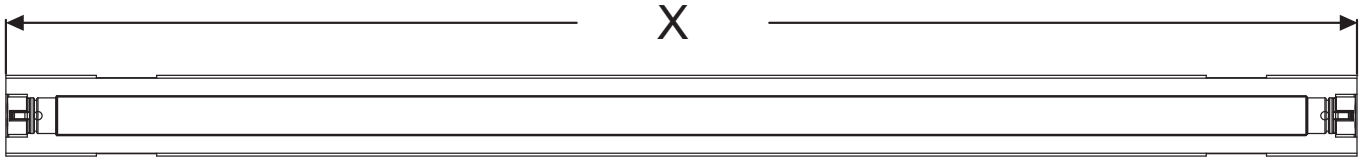

114 / 124H models: X=22.402"
121 / 134H models: X=34.213"
128 / 154H models: X=45.984"

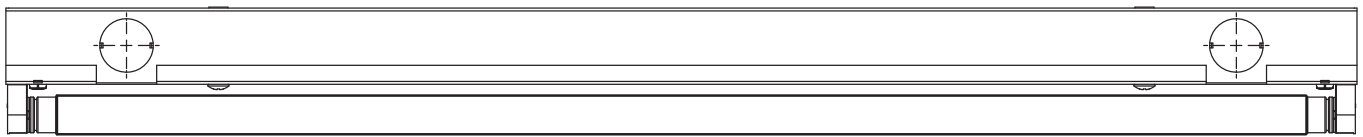

LP5 - Standard Mount

LS5 - Side Mount

