


TECHNICAL SPECIFICATIONS

OG

Aluminum Enclosed Light

CATALOG NUMBER _____
 TYPE _____
 DATE _____
 PREPARED BY _____
 PROJECT _____

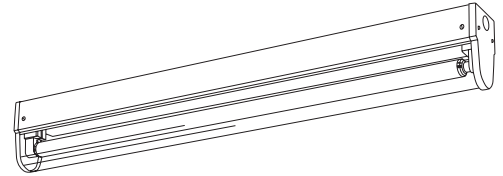

HOUSING: Die-formed, totally enclosed, fully gasketed, corrosion resistant aluminum housing. KOs provided.

SHIELDING: Extruded clear wraparound acrylic snap-in diffuser that will not discolor.

ELECTRICAL: Fully wired for UNV 120-277V, 50-60Hz operation with thermally protected, automatic resetting Class P, sound rated A ballast as standard unless otherwise specified (except HO models). U.L. damp location listed.

MOUNTING: Surface mount or stem hang, individual or continuous rows with OG-CB adapter.

OG Aluminum Enclosed Light Ordering Information

Series	# Lamps	Lamps	Ballast	Voltage
OG	1 = Single	48 = 48"	HO = High Output	UNV = 120-277V
	21 = Tandem, 2 Lamps	72 = 72"	HOB5 = High Output Electronic T12	120 = 120V
		96 = 96"	HOB11 = High Output Electronic T8	277 = 277V



OG-CB Continuous row band

Accessories

OG-CB = Continuous row adapter

PM(x) - Twin Pendant Mount - 2 white stems - specify length (24", 36", 48", 60", 72")

Dimensions

