




SLP Low Profile combines a sleek low-profile design, smooth white acrylic lens and die-cast white or brushed metal ends to create a high-tech designer appearance. The unit can be surface mounted or pendant hung with 1/16" aircraft cable, as shown. The **SLP** is ideal for office, residential and light commercial space.



Dimensions

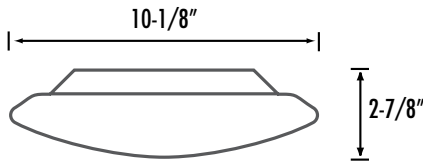

Length is 25" (SLPM 217)
Length is 49" (SLPM 232)

Housing

Die-formed heavy gauge steel with high-gloss, baked white enamel finish over rust inhibiting phosphate coat. Ends are hand finished to a stainless steel look. Inside is grooved to accept acrylic lens and avoid light loss.

Shielding

Smooth milk white formed acrylic.

Electrical

Fully wired for UNV 120-277V, 50-60Hz operation with thermally protected, automatic resetting Class P, sound rated A electronic ballast as standard unless otherwise specified. UL listed.

Mounting

Flush mounted or pendant hung with CACC Suspension Kit. CACC Suspension Kit includes white cord, white canopies and 1/16" aircraft cable. Individual mounting only.

SLP Series Ordering Information

Series	Ends	Lamps	Ballast	Voltage
SLP	M = Brushed metal W = White	217 = (2) 17W 24" T8 232 = (2) 32W 48" T8	B11 = Electronic T8 B22 = LPF T8/T12	UNV = 120-277V 120 = 120V 277 = 277V*

*B11 only

Accessories

CACC(xx)** = Cable Kit, includes 2 cables, mounting hardware, white power cord and canopies; specify length in inches (48 or 72)