



TY 244



FY 124

- Shallow 3-3/4" depth fits suspended or plaster ceilings.
- Metal light traps prevent light leak.
- Swing action cam latches for easy, tool-free access.
- Integral door hinges allow door to hinge or latch from either side.
- Built in T-Bar clips securely hold fixture to T-Bar grid.
- Die-formed, heavy gauge, steel housing.
- U.L. listed.



Troffers are ideal for grid, drywall and plaster ceilings. Choose from a wide selection of ballast, lamp configurations and lenses.





Troffers Ordering Information

Series	Size	Lamps
TY = Lay-In	124 = 1 x 4	232U = (2) 32W U6" T8**
FY = Flange	242 = 2 x 2	232 = (2) 32W 48" T8
	244 = 2 x 4	240 = (2) 34 or 40W 48" T12
		332 = (3) 32W 48" T8
		340 = (3) 34 or 40W 48" T12
		417 = (4) 17W 24" T8
		432 = (4) 32W 48" T8
		440 = (4) 34 or 40W 48" T12

** For 1-5/8", please specify

Options	Ballast	Switching	Voltage
ELS1 = Emergency Lighting (low lumens)	B11 = Electronic T8 B22 = LPF T8/T12 120V	For 3 and 4 lamp units Blank = dual ballasts	UNV = 120-277V 120 = 120V 277 = 277V
ELS2 = Emergency Lighting (medium lumens)		3L = (1) 3-lamp ballast	
ELS3 = Emergency Lighting (high lumens)		4L = (1) 4-lamp ballast	

Dimensions

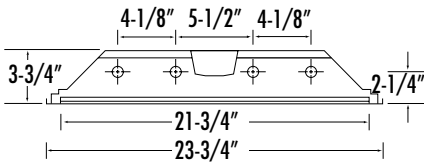

Options

- L = Lamps Installed (Specify Lamps) (U-lamp and TT lamps not installed)
- FL4 = 3/8", 6' flex with two #18, one ground and two connectors
- FL5 = 3/8", 6' flex with three #18, one ground and two connectors