

TECHNICAL SPECIFICATIONS

ST5 / SA5 Staggered fixed and adjustable strip



CATALOG NUMBER _____
 TYPE _____
 DATE _____
 PREPARED BY _____
 PROJECT _____

HOUSING: Die formed heavy gauge steel with high gloss powder coat finish. Removable wire-way access panel. Knockouts provided on ends and back for through or direct wiring. Lamp holders are "Tab" type for ease of relamping and to assure lamp is properly seated in the sockets.

ELECTRICAL: ST5 fixtures are electronic T5, 120-277V 50-60Hz and are UL/cUL listed.


MOUNTING: The ST5 and SS5 fixed and adjustable strips can be directly mounted in a cove or undercabinet in continuous rows.

ST5/SA5 Ordering Information

Series	Size	# Lamps	Lamp Type	Ballast	Voltage
ST5 = Two lamp T5 staggered strip fixture with 4" overlap	ST5	2	14 = 14 watt T5 (2' unit)	E = Electronic	U1 = 120-277V
	2 = 2' nominal length 26" overall length		21 = 21 watt T5 (3' unit)		
	3 = 3' nominal length 38" overall length		28 = 28 watt T5 (4' unit)		
SA5 = Two lamp T5 adjustable staggered strip fixture	SA5	2	54H = 54 watt T5HO (4' unit)		
	2 = 2' nominal length, adjusts to 30"				
	3 = 3' nominal length, adjusts to 49"				
	4 = 4' nominal length, adjusts to 65"				


ST5 Dimensions

2' Model

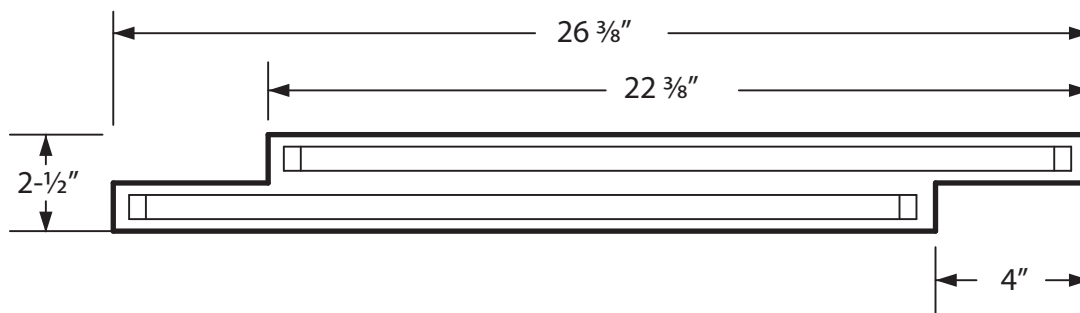

SA5 Dimensions

2', 3', and 4' Adjustable Models

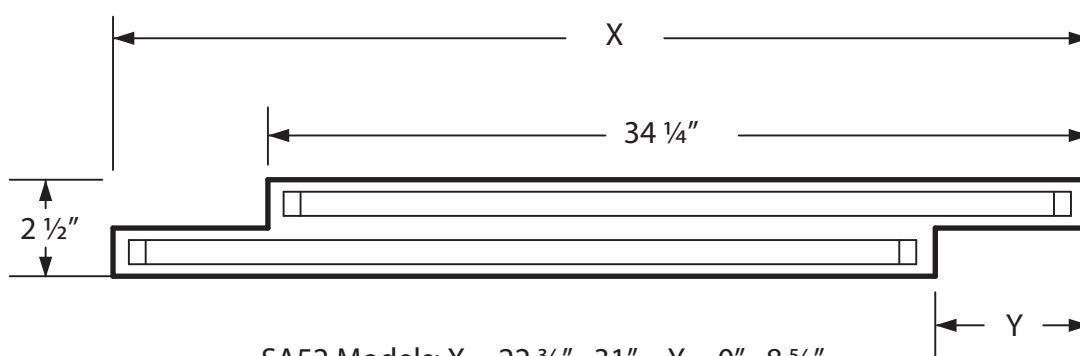

SA52 Models: X = 22 3/8" - 31" Y = 0" - 8 5/8"
 SA53 Models: X = 34 1/4" - 49" Y = 0" - 14 3/4"
 SA54 Models: X = 46" - 66" Y = 0" - 20"