


TECHNICAL SPECIFICATIONS

SAC Accent Cloud

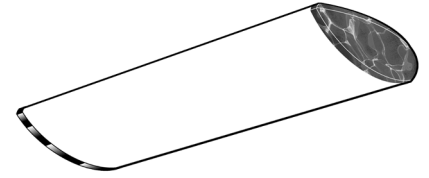

CATALOG NUMBER _____
 TYPE _____
 DATE _____
 PREPARED BY _____
 PROJECT _____

HOUSING: Die-formed heavy gauge steel with high-gloss baked white enamel finish over rust inhibiting phosphate coat.

SHIELDING: Translucent white acrylic diffuser with decorative end caps. Sconce is ADA compliant.

ELECTRICAL: Fluorescent wired for 120V, 60Hz AC operation, thermally protected, Class P, sound rated A, energy saving ballast, unless otherwise specified. Magnetic T12 shall be high power factor. Electronic T8 shall be high power factor, instant start, <20% harmonic distortion standard, specify suffix UNV for <10% harmonic distortion. Residential Electronic T8 shall be low power factor, Class B for EMI and RFI. Specify suffix UNV for universal voltage, 120 through 277V, 50/60Hz AC operation, Electronic T8 only. UL and C-UL listed.

MOUNTING: Ceiling mount.

SAC Ordering Information

Series	End Finish	Lamps	Ballast
SAC	AL = Alabaster	232 = (2) 32W 48" T8	B11 = Electronic T8
	BW = Bone White	332 = (3) 32W 48" T8	B11 RES = Residential Electronic T8
	IV = Ivory Marble		B22* = LPF T8/T12 120V
	PM = Peach Marble		
	WM = White Marble		
	VG = Verde Green		

*Dual ballasts required for 3 lamp model

Switching	Voltage
FOR 3 LAMP UNITS	UNV = 120-277V
Blank = dual ballasts	120 = 120V
3L = (1) 3-lamp ballast	277 = 277V**

FOR 2 LAMP UNITS
 Blank = single ballast
 2/1L = (2) 1-lamp ballasts

**B11 Only

Dimensions

