


TECHNICAL SPECIFICATIONS

SEP

Surface parabolic

CATALOG NUMBER _____
 TYPE _____
 DATE _____
 PREPARED BY _____
 PROJECT _____

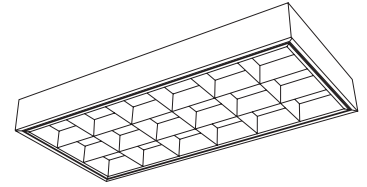

HOUSING: Die-formed heavy gauge steel with high-gloss, baked white post-painted enamel finish over rust inhibiting phosphate coat. Optional KOs available for continuous row mounting.

SHIELDING: Uniform low brightness in 60°-90° zone achieved with 3" deep low iridescence, anodized semi-specular aluminum parabolic louver. Hinged louver also available in white and gold.

ELECTRICAL: Fully wired for UNV 120-277V, 50-60Hz operation with thermally protected, automatic resetting Class P, sound rated A ballast as standard unless otherwise specified. UL listed.

MOUNTING: Surface mount. Four stems required for suspension mounting.

SEP Ordering Information

Series	Size	# Lamps	Lamp Type	Cell Configuration	Louver Finish
SEP	124 = 1 x 4	2	14 = 14W 24" T5	8C = (1 x 4) 1 row of 8	G = Gold
	242 = 2 x 2	3	17 = 17W 24" T8	9C = (2 x 2) 3 rows of 3	S = Specular Aluminum
	244 = 2 x 4	4	32 = 32W 48" T8	12C = (2 x 4) 2 rows of 6	W = White
			32U = 32W U6" T8*	18C = (2 x 4) 3 rows of 6	
			40TT = 40W 22" TT	24C3X8 = 2x4 (3 rows of 8)	
				24C4X6 = 2x4 (4 rows of 6)	
			32C = (2 x 4) 4 rows of 8		

*For 1 5/8" please specify; required for 3 lamp 32U.

Options	Ballast	Switching	Voltage
ELS1 = Emergency Lighting (low lumens)	B11 = Electronic T8	For 3 and 4 lamp units	UNV = 120-277V
ELS2 = Emergency Lighting (medium lumens)	B11HP(x) = HPT8*	Blank = dual ballasts	120 = 120V
ELS3 = Emergency Lighting (high lumens)	B14 = Electronic TT	3L = (1) 3-lamp ballast	277 = 277V
		4L = (1) 4-lamp ballast	
		For 2 lamp units	
		Blank = single ballast	
		2/1L = (2) 1-lamp ballasts	

*CEE listed T8; specify (L)ow, (N)ormal, or (H)igh ballast factor. Contact factory for NEMA Premium.

Options

L = Lamps Installed (Specify Lamps)
 SR = Specular reflector

SEP Surface Parabolic

Dimensions

