


TECHNICAL SPECIFICATIONS

STC Staggered Strip

CATALOG NUMBER _____
 TYPE _____
 DATE _____
 PREPARED BY _____
 PROJECT _____

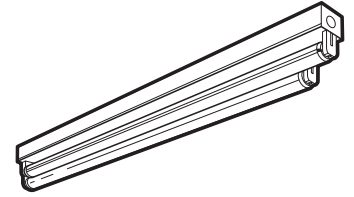

HOUSING: Die-formed heavy gauge steel with high-gloss, baked white enamel finish over rust inhibiting phosphate coat with removable wireway access panel. Fixture is shipped fully wired. Secure wireway cover with screw. KOs provided.

OPTIONS: Optional plug-in wiring system available.

ELECTRICAL: Fully wired for UNV 120-277V, 50-60Hz operation with thermally protected, automatic resetting Class P, sound rated A ballast as standard unless otherwise specified. UL listed damp location.

MOUNTING: Individual or continuous row. STC features staggered ends to eliminate shadows at overlap.

STC STAGGERED SERIES	
Single Lamp Length	Double Lamp Length
24"	27"
36"	39"
48"	51"
93" (2 lamp)	99" (4 lamp)

STC Ordering Information

Series	# Lamps	Lamp Type	ELS Options
STC	1	17 = 17W 24" T8	ELS1 = Emergency Lighting (low lumens)
	2	20 = 20W 24" T12	ELS2 = Emergency Lighting (medium lumens)
	21 = Tandem two Lamps	25 = 25W 36" T8	ELS3 = Emergency Lighting (high lumens)
	22 = Tandem four Lamps	30 = 30W 36" T12	
		32 = 32W 48" T8	
		40 = 34 or 40W 48" T12	

Ballast	Voltage	Options
B5 = Electronic T12	UNV = 120-277V	CORD AND PLUG
B11 = Electronic T8	120 = 120V	CPT(x)
B11HP(x) = HPT8*	277 = 277V	1 = 120V
D = Dimming (specify ballast)		2 = 277V
		CP3 = Cord & Plug - 120V Straight Blade 5-15P
		PLUG-IN CONNECTORS
		Ballast wired to Black:
		PL1 - one circuit, two wires
		PL2 BK - two circuits, three wires
		Ballast wired to Red:
		PL2 RD - two circuits, three wires
		FB = Fast blow fuse
		SB = Slow blow fuse

*CEE listed T8; specify (L)ow, (N)ormal, or (H)igh ballast factor. Contact factory for NEMA Premium.

Dimensions

