


# TECHNICAL SPECIFICATIONS

## Narrow Wraparound SY130

CATALOG NUMBER \_\_\_\_\_  
 TYPE \_\_\_\_\_  
 DATE \_\_\_\_\_  
 PREPARED BY \_\_\_\_\_  
 PROJECT \_\_\_\_\_

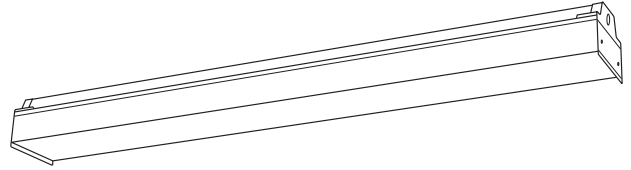

**HOUSING:** Die-formed heavy gauge steel with high-gloss, baked white enamel finish over rust inhibiting phosphate coat. Knockouts provided.

**SHIELDING:** Clear DR acrylic prismatic lens for improved impact resistance.

**ELECTRICAL:** Fully wired for UNV 120-277V, 50-60Hz operation with thermally protected, automatic resetting Class P, sound rated A ballast as standard unless otherwise specified. UL listed damp location.

**MOUNTING:** Individual or continuous row stem or surface mount. Only one CR band supplied with every tandem unit. For continuous row mounting, additional CR bands are needed.

### SY130 Series Ordering Information

| Series | # Lamps              | Lamps             | Options                                   |
|--------|----------------------|-------------------|---|
| SY130  | 1                    | 14 = 14W 24" T5   | ELS1 = Emergency Lighting (low lumens)    |
|        | 2                    | 17 = 17W 24" T8   | ELS2 = Emergency Lighting (medium lumens) |
|        | 21 = Tandem, 2 lamps | 24 = 24W 24" T5HO | ELS3 = Emergency Lighting (high lumens)   |
|        | 22 = Tandem, 4 lamps | 25 = 25W 36" T8   |   |
|        |                      | 28 = 28W 48" T5   |   |
|        |                      | 32 = 32W 48" T8   |   |
|        |                      | 54 = 54W 48" T5HO |   |

| Ballast             | Voltage        | Accessories   |
|---------------------|----------------|---|
| B11 = Electronic T8 | UNV = 120-277V | PM(x) = Pendant Mount, white stem - specify length in inches (24, 36, 48, 60, 72) |
| B11HP(x) = HPT8*    | 120 = 120V     | C = Single White Canopy   |
|                     | 277 = 277V     | CR = Continuous row mounting band   |

\*CEE listed T8; specify (L)ow, (N)ormal, or (H)igh ballast factor. Contact factory for NEMA Premium.

### Dimensions

