


TECHNICAL SPECIFICATIONS

SY950 Wraparound

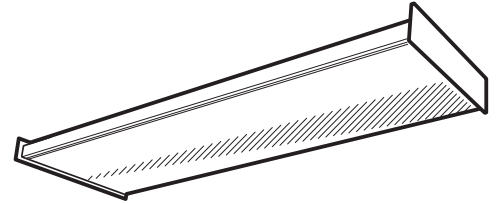

CATALOG NUMBER _____
TYPE _____
DATE _____
PREPARED BY _____
PROJECT _____

HOUSING: Die-formed heavy gauge steel with high-gloss, baked white enamel finish over rust inhibiting phosphate coat. Hinges from either side for easy maintenance.

SHIELDING: Clear DR acrylic prismatic lens for improved impact resistance.

ELECTRICAL: Fully wired for UNV 120-277V, 50-60Hz operation with thermally protected, automatic resetting Class P, sound rated A ballast as standard unless otherwise specified. UL listed.

MOUNTING: Individual or continuous row (CR), surface mount. Only one CR band supplied with every tandem unit. For continuous row mounting, additional CR bands are needed.

SY950 Ordering Information

Series	# Lamps	Lamp Type
SY950	2	14 = 14W 24" T5
	3	17 = 17W 24" T8
	4	24 = 24W 24" T5HO
	22 = Tandem, 4 lamps	28 = 28W 48" T5
		32 = 32W 48" T8
		54 = 54W 48" T5HO

Options	Ballast	Voltage
SR = Specular reflector	B11 = Electronic T8	UNV = 120-277V
ELS1 = Emergency Lighting (low lumens)	B11HP(x) = HPT8*	120 = 120V
ELS2 = Emergency Lighting (medium lumens)	B12 = Electronic T5	277 = 277V
ELS3 = Emergency Lighting (high lumens)		

NOTE: 3 lamp models require low profile emergency ballast

*CEE listed T8; specify (L)ow, (N)ormal, or (H)igh ballast factor. Contact factory for NEMA Premium.

Accessories

CR = Continuous row mounting band

SY920 Low Profile Wraparound

Dimensions

