


TE2P-27 cell controls light at glare producing angles and meets IES RP1 preferred criteria.

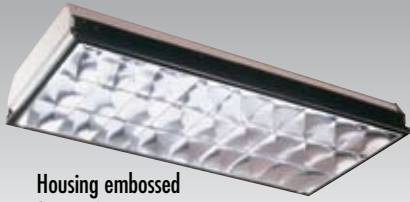

Housing embossed for rigidity.

**Para-Spec®** fixtures feature parabolic louvers manufactured to exacting engineering, materials and quality specifications to ensure superior performance and service life.

**Para-Spec®II** TE2P Deep Cell Parabolics are precision engineered to eliminate glare. In particular, optimal positioning of the lamps provides high-efficiency fixtures with uniform low brightness in the 60° - 90° zone. The TE2P complies with RP1.




TE2P 2x2 12 Cell

TE2P Precision Parabolics with full black reveal create a floating louver appearance and hinged louver allows easy relamping. Options include flex, master/satellite wiring and heat return functions. Protective poly sheet keeps louver clean during shipment and installation.



**Dimensions**

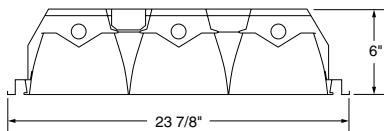

**Housing**

Die-formed heavy gauge steel with high-gloss, baked white enamel finish over rust inhibiting phosphate coat. Access plate provided with two KO's and ground screw.

**Shielding**

Precision engineered, low iridescent, anodized specular aluminum parabolic 4.25" deep cell louver equipped with T-hinges and spring latches to enable access from either side.



Precision design "cut-off" louver effectively eliminates glare in key zones.

**Electrical**

Fully wired for UNV 120-277V, 50-60Hz operation with thermally protected, automatic resetting Class P, sound rated A ballast as standard unless otherwise specified. UL listed.

**Mounting**

Optional EC515 Earthquake clip (page 91) for extra security for TE2P in T-Bar ceilings. Flanged units use trim kits (GCK) that require field assembly. See page 91.

**TE2P Series Ordering Information**

Series	Size	Lamps
TE2P = Lay-in	242 = 2 x 2	317 = (3) 17W 24" T8
FE2P = Flange	244 = 2 x 4	332 = (3) 32W 48" T8 340TT = (3) 40W TT

Cell Config/3 Rows	Options	Ballast	Switching	Voltage
12C = 12 cell specular (2x2)	SR = Specular Reflector ELS1 = Emergency Lighting (low lumens)	B11 = Electronic T8 B11HP(x) = HPT8* B14 = Electronic TT D = Dimming (specify ballast)	Blank = dual ballasts 3L = (1) 3-lamp ballast	UNV = 120-277V 120 = 120V 277 = 277V 347 = 347V
18C = 18 cell specular (2x4)	ELS2 = Emergency Lighting (medium lumens)			
27C = 27 cell specular (2x4)	ELS3 = Emergency Lighting (high lumens)			

\*CEE listed T8; specify (L)ow, (N)ormal, or (H)igh ballast factor. Contact factory for NEMA Premium.

Options	Accessories
L = Lamps Installed (Specify Lamps) FL4 = 3/8", 6' flex with two #18, one ground and two connectors FL5 = 3/8", 6' flex with three #18, one ground and two connectors M = Master; includes 9' intertie and snap-in connector S = Satellite; includes snap-in connector FB = Fast Blow Fuse SB = Slow Blow Fuse BP = Bulk Pack	EC515 = Earthquake Clip (Specify FEP for flange unit or use GCK kit)  GCK (Grid Conversion Kits) GCK 22 = 2' x 2' GCK 24 = 2' x 4'