


TE3P

Shallow plenum parabolic

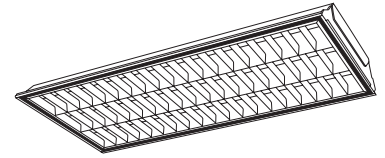

CATALOG NUMBER _____
 TYPE _____
 DATE _____
 PREPARED BY _____
 PROJECT _____

HOUSING: Die-formed heavy gauge steel with high-gloss, baked white enamel finish over rust inhibiting phosphate coat. Knockouts and/or access plate provided.

SHIELDING: Excellent VCP; meets IES RP-1. Low iridescence, anodized semi-specular or specular aluminum parabolic louver is installed in flush steel door frame (black) with mitered corners that can be hinged from either side. Swing-action cam latches provide positive fit. Light traps standard. High-reflectance white reflector standard.

ELECTRICAL: Fully wired for UNV 120-277V, 50-60Hz operation with thermally protected, automatic resetting Class P, sound rated A ballast as standard unless otherwise specified. UL listed.

MOUNTING: Lay-in (T) or Flange (F) troffer with access plate provided with 2 KOs and ground screw. 2 x 2 and 2 x 4 flanged fixtures require field assembly. Optional ECS15 Earthquake Clip for lay-in grid ceilings. Specify FE3P for flange unit or use GCK kit. Flanged units require field assembly.

TE3P Series Ordering Information

Series	Spec Door	Size	Lamps	Cell Config/3 Rows
TE3P = Lay-in	Black steel, standard	242 = 2 x 2	317 = (3) 17W 24" T8	27C = 27 cell semi-Specular (2x2)
FE3P = Flange	WF = Flat steel, white	244 = 2 x 4	332 = (3) 32W 48" T8	27CS = 27 cell specular (2x2) 57C = 57 cell semi-Specular (2x4) 57CS = 57 cell specular (2x4)

Options	Ballast	Switching	Voltage
SR = Specular Reflector	B11 = Electronic T8	Blank = dual ballasts (2x4 only)	UNV = 120-277V
ELS1 = Emergency Lighting (low lumens)	B11HP(x) = HPT8*	3L = (1) 3-lamp ballast	120 = 120V
ELS2 = Emergency Lighting (medium lumens)	D = Dimming (specify ballast)		277 = 277V
ELS3 = Emergency Lighting (high lumens)			347 = 347V

*CEE listed T8; specify (L)ow, (N)ormal, or (H)igh ballast factor. Contact factory for NEMA Premium.

Options	Accessories
L = Lamps Installed (Specify Lamps)	ECS15 = Earthquake Clip (Specify FEP for flange unit or use GCK kit)
FL4 = 3/8", 6' flex with two #18, one ground and two connectors	GCK (Grid Conversion Kits)
FL5 = 3/8", 6' flex with three #18, one ground and two connectors	GCK 22 = 2' x 2'
M = Master; includes 9' intertie and snap-in connector	GCK 24 = 2' x 4'
S = Satellite; includes snap-in connector	
FB = Fast Blow Fuse	
SB = Slow Blow Fuse	
BP = Bulk Pack	

Dimensions

