


TEP and FEP
Deep parabolic

CATALOG NUMBER _____
 TYPE _____
 DATE _____
 PREPARED BY _____
 PROJECT _____

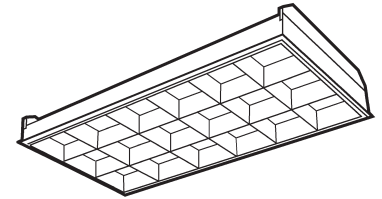

HOUSING: Die-formed heavy gauge steel with high-gloss, baked white enamel finish over rust inhibiting phosphate coat. Full black reveal and hinged louver for easy relamping. Access plate provided with 2 KOs and ground screw.

SHIELDING: Low iridescence, anodized, semi-specular aluminum parabolic, nominal 3" deep-cell louver held securely by steel latches. "T" hinges allow access from either side.

ELECTRICAL: Fully wired for UNV 120-277V, 50-60Hz operation with thermally protected, automatic resetting Class P, sound rated A ballast as standard unless otherwise specified. UL listed.


MOUNTING: Optional EC515 Earthquake Clip for lay-in TEP grid ceilings. Specify FEP for flange unit or use GCK kit. Flanged units require field assembly.

TEP and FEP Series Ordering Information


Series	Size	# Lamps	Lamp type	Air Handling	Cell Configuration
TEP = Lay-in 3" deep cell, semi-specular	124 = 1 x 4	2	14 = 14W T5 17 = 17W T8	Static (standard) AC = Vented on all sides**	8C = 1x4 (1 row of 8) 9C = 2x2 (3 rows of 3)
FEP = Flanged 3" deep cell, semi-specular	242 = 2 x 2	3	24 = 24W T5HO 28 = 28W T5 32U = 32W U6" T8* 32 = 32W T8 40TT = 40W TT 54 = 54W T5HO 55TT = 55W TT	AH = Vented on 2' side AS = Vented on 4' side	12C = 2x2 (3 rows of 4) 12C = 2x4 (2 rows of 6) 16C = 2x2 (4 rows of 4) 18C = 2x4 (3 rows of 6) 24C3X8 = 2x4 (3 rows of 8) 24C4X6 = 2x4 (4 rows of 6) 27C = 2x4 (3 rows of 9) 32C = 2x4 (4 rows of 8)

* For 1 5/8" please specify
 ** Not available on 1x4 units


Dimensions



TEP

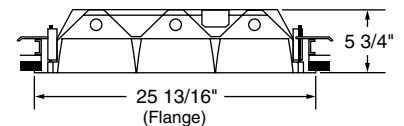

FEP




FEP

Louver Finish	Options	Ballast	Switching	Voltage
<i>Semi Specular</i>	SR = Specular reflector**	B11 = Electronic T8	For 3 and 4 lamp units	UNV = 120-277V
<i>(standard)</i>	WR = White reflector**	B11HP(x) = HPT8*	<i>Blank</i> = dual ballasts	120 = 120V
G = Gold	ELS1 = Emergency Lighting (low lumens)	B12 = Electronic T5	3L = (1) 3-lamp ballast	277 = 277V
W = White	ELS2 = Emergency Lighting (medium lumens)	B14 = Electronic TT	4L = (1) 4-lamp ballast	
S = Specular	ELS3 = Emergency Lighting (high lumens)	D = Dimming (specify ballast)	For 2 lamp units	
			<i>Blank</i> = single ballast	
			2/1L = (2) 1-lamp ballasts	

*CEE listed T8; specify (L)ow, (N)ormal, or (H)igh ballast factor. Contact factory for NEMA Premium.
 **Contact factory for availability

Options	Accessories
L = Lamps Installed (Specify Lamps) (U-lamp and TT lamps not installed)	EC515 = Earthquake Clip
FL4 = 3/8", 6' flex with two #18, one ground and two connectors*	<i>GCK (Grid Conversion Kits)</i>
FL5 = 3/8", 6' flex with three #18, one ground and two connectors*	GCK 14 = 1' x 4'
M = Master; includes 9" intertie and snap-in connector	GCK 22 = 2' x 2'
S = Satellite; includes snap-in connector	GCK 24 = 2' x 4'
FB = Fast Blow Fuse	
SB = Slow Blow Fuse	
BP = Bulk Pack	

*Contact factory for other available options

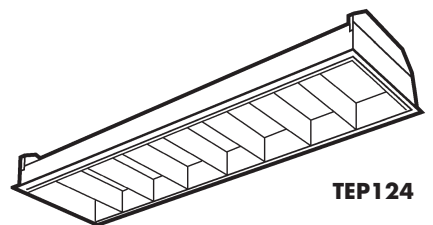

TEP124