


TEP-244 32 Cell


TEP and FEP Deep Cell Parabolics are attractive high-efficiency fixtures that produce uniform low brightness in the 60° - 90° zone.




Dimensions



TEP

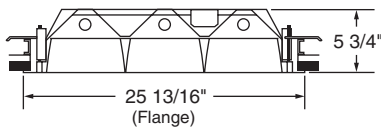

FEP



FEP

Housing

Die-formed heavy gauge steel with high-gloss, baked white enamel finish over rust inhibiting phosphate coat. Full black reveal and hinged louver for easy relamping. Access plate provided with 2 KOs and ground screw.

Shielding

Low iridescence, anodized, semi-specular aluminum parabolic, nominal 3" deep-cell louver held securely by steel latches. "T" hinges allow access from either side.

Electrical

Fully wired for UNV 120-277V, 50-60Hz operation with thermally protected, automatic resetting Class P, sound rated A ballast as standard unless otherwise specified. UL listed.

Mounting

Optional EC515 Earthquake Clip for lay-in TEP grid ceilings. Specify FEP for flange unit or use GCK kit. (See page 91.) Flanged units require field assembly.

TEP and FEP Series Ordering Information

Series	Size	# Lamps	Lamp type	Air Handling	Cell Configuration
TEP = Lay-in 3" deep cell, semi-specular	124 = 1 x 4	2	14 = 14W T5	Static (standard) AC = Vented on all sides** AH = Vented on 2' side AS = Vented on 4' side	8C = 1x4 (1 row of 8)
	242 = 2 x 2	3	17 = 17W T8		9C = 2x2 (3 rows of 3)
FEP = Flanged 3" deep cell, semi-specular	244 = 2 x 4	4	24 = 24W T5HO		12C = 2x2 (3 rows of 4)
			28 = 28W T5		12C = 2x4 (2 rows of 6)
			32U = 32W U6" T8*		16C = 2x2 (4 rows of 4)
			32 = 32W T8		18C = 2x4 (3 rows of 6)
			40TT = 40W TT		24C3X8 = 2x4 (3 rows of 8)
			54 = 54W T5HO		24C4X6 = 2x4 (4 rows of 6)
				27C = 2x4 (3 rows of 9)	
				32C = 2x4 (4 rows of 8)	

*For 1 5/8" please specify
**Not available on 1x4 units

Louver Finish	Options	Ballast	Switching	Voltage
Semi Specular (standard) G = Gold W = White S = Specular	SR = Specular reflector** WR = White reflector**	B11 = Electronic T8 B11HP(x) = HPT8* B12 = Electronic T5 B14 = Electronic TT D = Dimming (specify ballast)	For 3 and 4 lamp units Blank = dual ballasts 3L = (1) 3-lamp ballast 4L = (1) 4-lamp ballast	UNV = 120-277V 120 = 120V 277 = 277V
	ELS1 = Emergency Lighting (low lumens)			
	ELS2 = Emergency Lighting (medium lumens)			
	ELS3 = Emergency Lighting (high lumens)			
			For 2 lamp units Blank = single ballast 2/1L = (2) 1-lamp ballasts	

*CEE listed T8; specify (L)ow, (N)ormal, or (H)igh ballast factor. Contact factory for NEMA Premium.

**Contact factory for availability

Options	Accessories
L = Lamps Installed (Specify Lamps) (U-lamp and TT lamps not installed) FL4 = 3/8", 6' flex with two #18, one ground and two connectors* FL5 = 3/8", 6' flex with three #18, one ground and two connectors* M = Master; includes 9' intertie and snap-in connector S = Satellite; includes snap-in connector FB = Fast Blow Fuse SB = Slow Blow Fuse BP = Bulk Pack	EC515 = Earthquake Clip GCK (Grid Conversion Kits) GCK 14 = 1' x 4' GCK 22 = 2' x 2' GCK 24 = 2' x 4'

*Contact factory for other available options