



Housing

Marine Grade A, heavy-gauge aluminum with gasketing for maximum corrosion resistance. Models with painted parts receive high-gloss baked enamel applied after pre-treatment to ensure superior paint adhesion and rust resistance. Incandescent and Compact fluorescent fixtures have white housings.

Shielding

High-impact, UV Treated, clear prismatic polycarbonate for remarkable impact strength.

Electrical

Incandescent fixtures have medium base socket. Fluorescent models are wired for 120V, 60Hz operation. For HID model, see page 212.


Mounting

Ceiling Mount.

V1000 marine Grade A aluminum housing keeps out moisture, preventing rust, and also promotes longer lamp life and longer ballast life due to better heat dissipation and cooler operating temperatures. The long life span of the ballast on CFL results in lower maintenance costs.



Dimensions

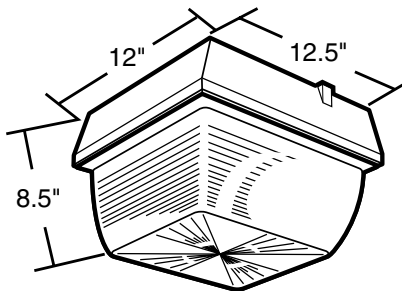

V1000 Series Ordering Information

Series	Lamp Type	Housing
V10	00 = (2) 60W A19 18 = (2) 9W CFL 26 = (2) 13W CFL 26Q = (1) 26W Quad 52Q = (2) 26W Quad <i>See page 212 for HID model (GCS)</i>	A = Aluminum (standard)

Voltage	Options	Accessories
UNV = 120-277V 120 = 120V 277 = 277V	MS = Maximum Security (Tamperproof screws) L1 = Lamps	V101A = Aluminum back box for 1/2" conduit, white TSD = Tamper-proof screwdriver