


TECHNICAL SPECIFICATIONS

V4000 Vandal Resistant

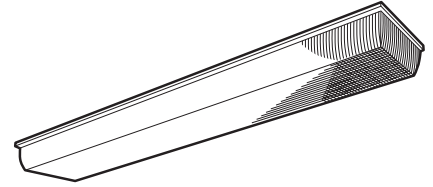

CATALOG NUMBER _____
 TYPE _____
 DATE _____
 PREPARED BY _____
 PROJECT _____

HOUSING: Marine Grade A, heavy-gauge aluminum with gasketing for maximum corrosion resistance, offered with optional back boxes. Models with painted parts receive high-gloss baked enamel applied after pre-treatment to ensure superior paint adhesion and rust resistance. Fixtures have white housing.

SHIELDING: High-impact, UV Treated, multipatterned polycarbonate for remarkable impact strength.

ELECTRICAL: Fully wired for UNV 120-277V, 50-60Hz operation with thermally protected, automatic resetting Class P, sound rated A ballast as standard unless otherwise specified. UL listed, wet location ceiling mount, damp location wall mount.

MOUNTING: Wall or ceiling, indoor. Corner mount available.



V4000 Series Ordering Information

| Series | Lamp Type | Housing | Ballast |
|---|-----------------------------|--------------------------------|----------------------------|
| V4 | 217 = (2) 17W 24" T8 | A = Aluminum (standard) | B11 = Electronic T8 |
| VC4 = Vandal Resistant, steel corner box | 232 = (2) 32W 48" T8 | | B11HP(x) = HPT8* |


*CEE listed T8; specify (L)ow, (N)ormal, or (H)igh ballast factor. Contact factory for NEMA Premium.

| Voltage | Options | Accessories |
|-----------------------|--|--|
| UNV = 120-277V | MS = Maximum security (Tamperproof screws) | V401A20 = Aluminum back box for 1/2" conduit for 20W unit |
| 120 = 120V | | V401A40 = Aluminum back box for 1/2" conduit for 40W unit |
| 277 = 277V | L1 = Lamps | TSD = Tamper-proof screwdriver |

Dimensions

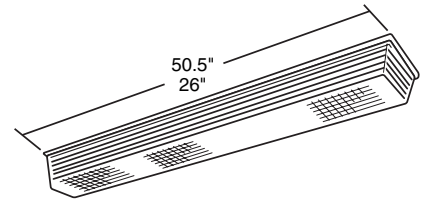

with Back Box



Corner Box