

Housing

Marine Grade A heavy-gauge aluminum, painted black, with gasketing for maximum corrosion resistance. Models with painted parts receive high-gloss baked enamel applied after pre-treatment to ensure superior paint adhesion and rust resistance.

Shielding


White polycarbonate, high-impact, UV stabilized lens.

Electrical

Wired for 120V, 60Hz operation. UL listed, wet location.


Mounting

Wall, ceiling, indoor, outdoor.

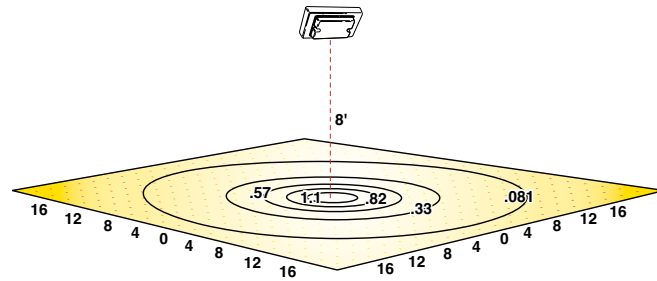

Horizontal Illuminance Analysis: Model V9026
Scale and Surface: .125" to 1' (1' Grid)
Units: Footcandles

Dimensions

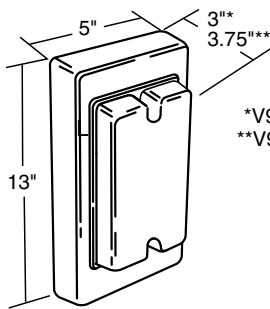

*V9013, V9014
**V9026

V9000 Series Ordering Information

Series	Lamp Type	Lens
V90	13 = (1) 13W CFL 14 = (2) 7W CFL 26 = (2) 13W CFL	W = White polycarbonate lens (standard)

Voltage	Housing	Options	Accessories
120 = 120V 277 = 277V	A = Aluminum (standard)	L1 = Lamps	TSD = Tamper-proof screwdriver