


TECHNICAL SPECIFICATIONS

CATALOG NUMBER _____
 TYPE _____
 DATE _____
 PREPARED BY _____
 PROJECT _____

WCFO Drop Dish

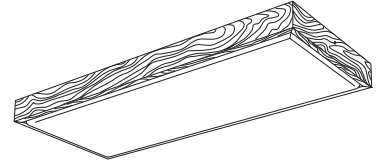

HOUSING: Die-formed heavy gauge steel with high-gloss baked white enamel finish over rust inhibiting phosphate coat.

SHIELDING: Drop dish translucent milk white acrylic diffuser.

FRAME: Solid oak with medium oak finish.

ELECTRICAL: Fluorescent wired for 120V, 60Hz AC operation, thermally protected, Class P, sound rated A, energy saving ballast, unless otherwise specified. Magnetic T12 shall be high power factor. Electronic T8 shall be high power factor, instant start, <20% harmonic distortion standard, specify suffix UNV for <10% harmonic distortion. Residential Electronic T8 shall be low power factor, Class B for EMI and RFI. Specify suffix UNV for universal voltage, 120 through 277V, 50/60Hz AC operation, Electronic T8 only. UL and C-UL listed.

MOUNTING: Ceiling mount.

Oak Drop Dish Ordering Information

Series	Lamps	Ballast	Switching	Voltage
WCFO	217 = (2) 17W 24" T8	B11 = Electronic T8	FOR 4 LAMP UNITS	UNV = 120-277V
	232 = (2) 32W 48" T8	B11 RES = Residential Electronic T8	Blank = dual ballasts	120 = 120V
	417 = (4) 17W 24" T8	B22* = LPF T8/T12	4L = (1) 4-lamp ballast	277 = 277V**
	432 = (4) 32W 48" T8			
			FOR 2 LAMP UNITS	
			Blank = single ballast	
			2/1L = (2) 1-lamp ballasts	

*Dual ballasts required for 4 lamp models

**B11 Only

Dimensions

