


## WGCO Oak Grid

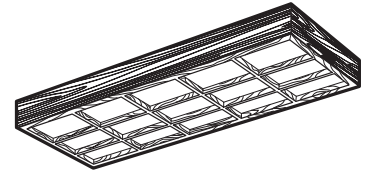

CATALOG NUMBER \_\_\_\_\_  
 TYPE \_\_\_\_\_  
 DATE \_\_\_\_\_  
 PREPARED BY \_\_\_\_\_  
 PROJECT \_\_\_\_\_

**HOUSING:** Die-formed heavy gauge steel with high-gloss baked white enamel finish over rust inhibiting phosphate coat.

**SHIELDING:** Translucent milk white acrylic diffuser.

**FRAME:** Solid oak grid with medium oak stain and hand-rubbed finish.

**ELECTRICAL:** Fluorescent wired for 120V, 60Hz AC operation, thermally protected, Class P, sound rated A, energy saving ballast, unless otherwise specified. Magnetic T12 shall be high power factor. Electronic T8 shall be high power factor, instant start, <20% harmonic distortion standard, specify suffix UNV for <10% harmonic distortion. Residential Electronic T8 shall be low power factor, Class B for EMI and RFI. Specify suffix UNV for universal voltage, 120 through 277V, 50/60Hz AC operation, Electronic T8 only. UL and C-UL listed.

**MOUNTING:** Ceiling mount.

**CRITICAL APPLICATION:** Simkar strives to offer the most current product designs and value. Consequently, all Simkar products are subject to redesign and revision. Critical applications such as size, operating temperature, or sensor operation should be confirmed with the factory.

### Oak Grid Ordering Information

Series	Lamps	Ballast	Switching	Voltage
WGCO	217 = (2) 17W 24" T8	B11 = Electronic T8	<b>FOR 4 LAMP UNITS</b>	UNV = 120-277V
	232 = (2) 32W 48" T8	B11 RES = Residential Electronic T8	Blank = dual ballasts	120 = 120V
	417 = (4) 17W 24" T8	B22* = LPF T8/T12	4L = (1) 4-lamp ballast	277 = 277V**
	432 = (4) 32W 48" T8		<b>FOR 2 LAMP UNITS</b>	
			Blank = single ballast	
			2/1L = (2) 1-lamp ballasts	

\*Dual ballasts required for 4 lamp models

\*\*B11 Only

### Dimensions

