


TECHNICAL SPECIFICATIONS

Corridor Wraparound SP175

CATALOG NUMBER _____
 TYPE _____
 DATE _____
 PREPARED BY _____
 PROJECT _____

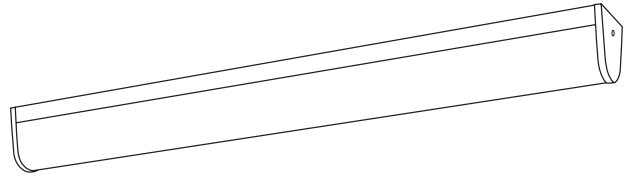

HOUSING: Die-formed heavy gauge steel with high-gloss, baked white enamel finish over rust inhibiting phosphate coat. Knockouts provided.

SHIELDING: Milk white acrylic.

ELECTRICAL: Fully wired for UNV 120-277V, 50-60Hz operation with thermally protected, automatic resetting Class P, sound rated A ballast as standard unless otherwise specified. UL listed damp location.

MOUNTING: Individual or continuous row. Stem or surface mount. Order accessory CR-SP175 for continuous row mounting.

SP175 Series Ordering Information

Series	# Lamps	Lamps
SP175	1	17 = 17W 24" T8
	21 = Tandem, 2 Lamps (32W only)	25 = 25W 36" T8
		32 = 32W 48" T8

ELS Option	Ballast	Voltage
ELS1 = Emergency Lighting (low lumens)	B11 = Electronic T8	UNV = 120-277V
ELS2 = Emergency Lighting (medium lumens)	B11HP(x) = HPT8*	120 = 120V
ELS3 = Emergency Lighting (high lumens)		277 = 277V

*CEE listed T8; specify (L)ow, (N)ormal, or (H)igh ballast factor. Contact factory for NEMA Premium.

Accessories

PM(x) = Pendant Mount, white stem - specify length in inches (**24, 36, 48, 60, 72**)
C = Single White Canopy
CR-SP175 = Continuous row mounting band

Dimensions

