


**SYLP**

**Low Profile Surface Box**

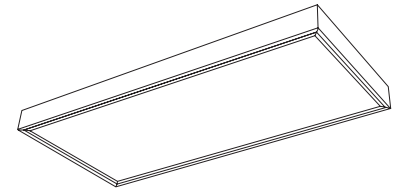

CATALOG NUMBER \_\_\_\_\_  
 TYPE \_\_\_\_\_  
 DATE \_\_\_\_\_  
 PREPARED BY \_\_\_\_\_  
 PROJECT \_\_\_\_\_

**HOUSING:** Die-formed heavy gauge steel with high-gloss, baked white enamel finish over rust inhibiting phosphate coat. Knockouts provided.

**SHIELDING:** A-12 pattern clear acrylic or polycarbonate prismatic lens and cubed louvers installed in flush white steel door that can be hinged from either side. Slide-action latches provide positive fit. Light seal standard.

**ELECTRICAL:** Fully wired for UNV 120-277V, 50-60Hz operation with thermally protected, automatic resetting Class P, sound rated A ballast as standard unless otherwise specified. UL listed.

**MOUNTING:** Surface or stem mount. Use four stems per 2x2 or 2x4, two for 1x4 unit. White canopies available.

**SYLP Series Ordering Information**

Series	Diffuser	Depth	Size
S	Y = Clear prismatic acrylic (standard) A = 1/2" x 1/2" x 1/2" cell J = 3/4" x 3/4" x 1/2" cell L = 1/2" x 1/2" x 1/2" egg crate, white B = .125 clear prismatic polycarbonate K = .125 clear prismatic acrylic P = Drop dish W = Flat white acrylic	LP = Low profile (3")	124 = 1 x 4 242 = 2 x 2 244 = 2 x 4

# Lamps	Lamps	Options	Ballast	Switching
1	17 = 17W 24" T8	ELS1 = Emergency Lighting (low lumens)	B11 = Electronic T8 B11HP(x) = HPT8 (NBF)**	<i>For 3 and 4 lamp units</i> Blank = dual ballasts
2	28 = 28W 48" T5	ELS2 = Emergency Lighting (medium lumens)	B12 = Electronic T5 D = Dimming (specify ballast)	3L = (1) 3-lamp ballast 4L = (1) 4-lamp ballast
3	32 = 32W 48" T8	ELS3 = Emergency Lighting (high lumens)		<i>For 2 lamp units</i> Blank = single ballast 2/1L = (2) 1-lamp ballasts
4	32U = 32W U6" T8*			
6	54 = 54W 48" T5HO			

\* For 1-5/8" please specify

\*\*CEE listed T8; specify (L)ow, (N)ormal, or (H)igh ballast factor. Contact factory for NEMA Premium.

Voltage	Options	Accessories
UNV = 120-277V 120 = 120V 277 = 277V	SR = Specular reflector (91% Reflectivity)	PM(x) = Pendant Mount, white stem - specify length in inches (24, 36, 48, 60, 72) C = Single White Canopy
		1x4 models require 2 stems 2x2 and 2x4 models require 4 stems

# SYLP Low Profile Surface

## Dimensions

